



4880 10CA 4P

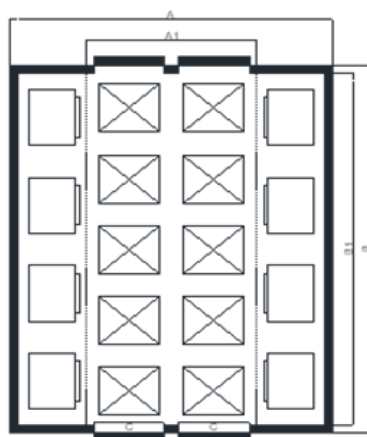

Codice	A	B	A1	B1	H	Porte	Luce porta	Carrelli	Prezzo €
Code	est/ext		int/int		est/ext	Doors	Door clearance	Trolleys	
	mm	mm	mm	mm	mm		mm	A	
AB2 428488C3+3	4280	4880	2420	4420	2380	4	930	10	

Codice	Compressore	Temperatura in cella	Potenza frigorifera		Assorbimento	Tensione
Code	compressor	temperature in the cell	cooling capacity		absorption	Tension
		°C	W	°C	W	V
AB2 428488C3+3	HP30,0+30,0	0/-35 -40	41420	-45+45	66200	400

5180 12CA 4P

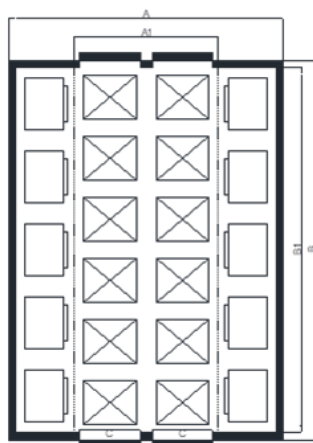

Codice	A	B	A1	B1	H	Porte	Luce porta	Carrelli	Prezzo €
Code	est/ext		int/int		est/ext	Doors	Door clearance	Trolleys	
	mm	mm	mm	mm	mm		mm	A	
AB2 428518C3+3	4280	5180	2420	5020	2380	4	930	12	

Codice	Compressore	Temperatura in cella	Potenza frigorifera		Assorbimento	Tensione
Code	compressor	temperature in the cell	cooling capacity		absorption	Tension
		°C	W	°C	W	V
AB 428518C3+3	HP30,0+30,0	0/-35 -40	41420	-45+45	66200	400

ABBATTITORI DI TEMPERATURA

CARATTERISTICHE E OPTIONAL

	ROLL IN	PROFESSIONA L	
Pannellatura interna in acciaio inox Aisi304 / esterno acciaio zincato		X	
Pannellatura interna ed esterna in acciaio inox Aisi 304	X		
Solo facciata Inox			
Colore pannelli Grigio Simil Inox o Antracite		X	
Spessore pannelli mm 80	X		
Spessore pannelli mm 100		X	
Rampa di accesso inox Aisi 304		X	
Cremagliere e 20 coppie guide portateglie (solo per ROLL IN)			
Coppia guide aggiuntiva (solo per ROLL IN)			
Unità aperta	X		
Unità carenata		X	
Unità silenziata			
Kit Remotazione Unità entro metri 10		X	
Kit Remotazione Unità oltre i 10 metri			
Batteria di nostra produzione	X		
Batteria a pavimento KFL		X	
Pannello Touch 7" EVCO con sonda al cuore integrata	X		
Pannello Touch 7" STM con sonda al cuore integrata		X	
Connessione Internet per predisposizione industria 4.0		X	
Supplemento per voltaggi speciali			
Supplemento per certificazione UL			
Supplemento per registrazione impianto sul portale Fgas			
Montaggio			
Viaggio, vitto e alloggio			

BLAST CHILLER

FEATURES AND OPTIONS

	ROLL IN	PROFESSIONAL	OPTIONAL (PRICE TO BE ADDED TO THE NET AMOUNT)
Internal paneling in AISI 304 stainless steel / external galvanized steel		X	
Internal and external paneling in AISI 304 stainless steel	X		
Stainless steel front only			
Panel color: grey stainless-steel effect or anthracite		X	
Panel thickness: 80 mm	X		
Panel thickness: 100 mm		X	
Access ramp in AISI 304 stainless steel		X	
Rack system and 20 pairs of tray guides (ROLL IN only)			
Additional pair of tray guides (ROLL IN only)			
Open unit	X		
Cased unit		X	
Soundproofed unit			
Unit remote installation kit up to 10 meters		X	
Unit remote installation kit over 10 meters			
Evaporator coil of our own manufacture	X		
Floor-mounted KFL evaporator coil		X	
7" EVCO touch panel with integrated core temperature probe	X		
7" STM touch panel with integrated core temperature probe		X	
Internet connection for Industry 4.0 readiness		X	
Surcharge for special voltages			
Surcharge for UL certification			
Surcharge for system registration on the F-Gas portal			
Installation			
Travel, board, and lodging			